


DK245 Rhino-Rack VA, Aero, Euro & HD crossbar instruction

CHART







IDENTIFICATION CHART

VA crossbar AERO crossbar

EURO crossbar H

HD crossbar

								AERU	crosspar EURO crosspar HD crosspar					
			FRONT CROSSBAR						REAR CROSSBAR					
			V		VA VA	AERO EURO	HD		V.	$\stackrel{\smile}{}$	VA VA	AERO EURO	HD	
Vehicle	Date	Crossbar	Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Volvo S80 4dr sedan	2006-	1260mm	M367 SUB0256	M367 SUB0256	181mm	68mm	1010mm / 39,49/64"	OUT	M366 SUB0256	M366 SUB0256	189mm	76mm	1026mm / 40,25/64"	OUT
			Arrow FORWARD				00,10701		Arro FORW					




DK245 Rhino-Rack VA, Aero, Euro & HD crossbar instruction


Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

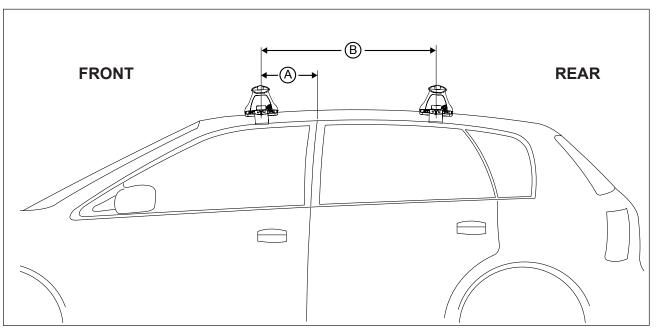

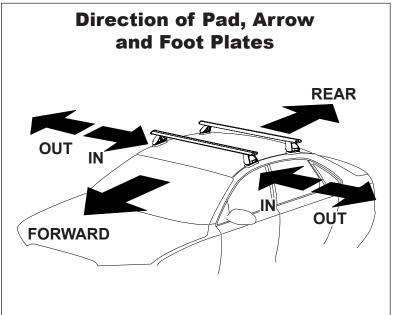

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Volvo S80 4dr sedan	2006-	260mm / 10,15/64"	680mm / 26,49/64"	75kg / 165lbs

Document No. R029 Issue Date: 20 December 2013 Page 2 of 2