




rockymounts

AUSTRALIA

Plate Direct Mount Kit.



Guidelines


- Ensure hardware is secure before use.
 - Periodically check hardware during use.
 - Only use kit as intended.
 - Check vehicle suitability with LED auxillary lights.
- NOTE: Some vehicles may require resistors. Direct Mount Kit is available for Rockymounts bike carriers.

Parts Included



Features:

- 1- Plate bracket A (right).
- 2 - Plate bracket B (left).
- 3 - Plate bracket C (x2)
- 4 - R clip (x1)
- 5 - M8 flat washer (x12)
- 6 - M8 nyloc nut (x4)
- 7 - M8 x 20mm button head screw (x6)
- 8 - M8 spring washer (x2)



NOTE: For use with auxiliary plates only.

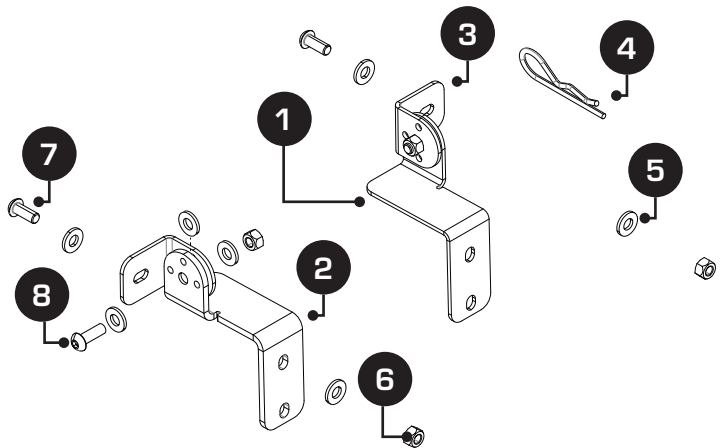

- 1 A - Attach the Bike carrier to car.
B - Loosen all 4 bolts on outside wheel tray. Then remove the top two.

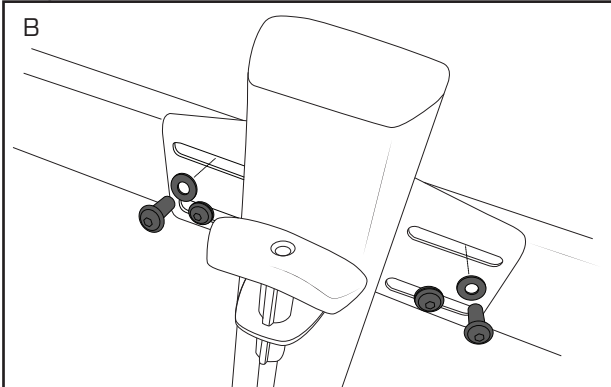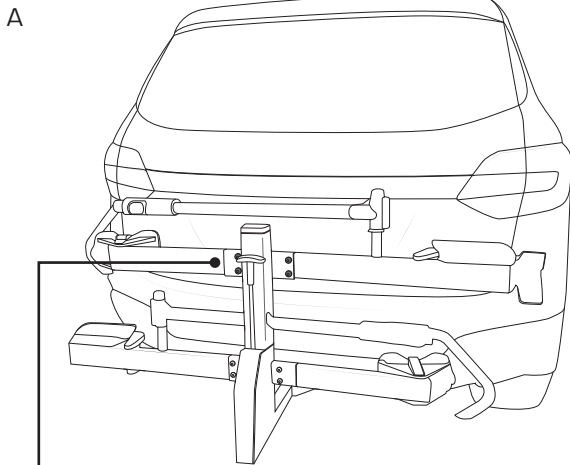


- 2 Position wheel tray so its threads are centred withing the corresponding slots.

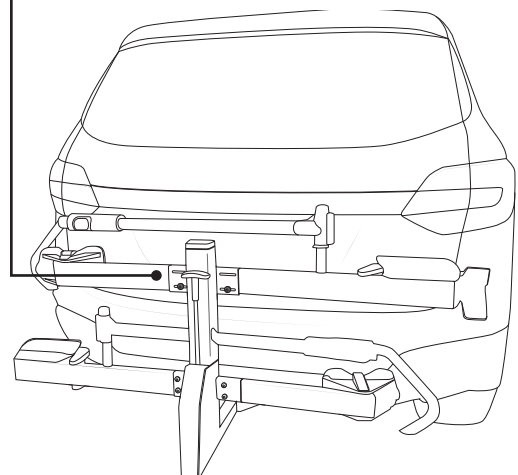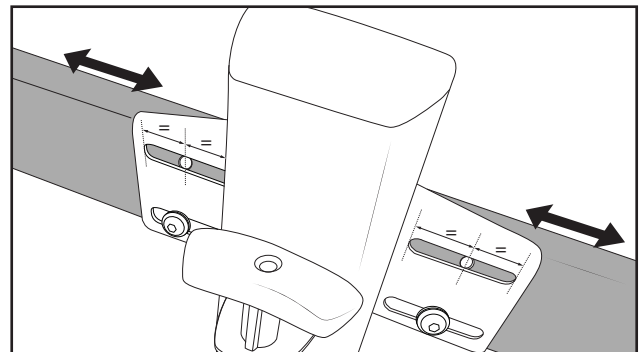





- 3** Using M8x20mm button head screws with spring and flat washers, fit bracket A and B.

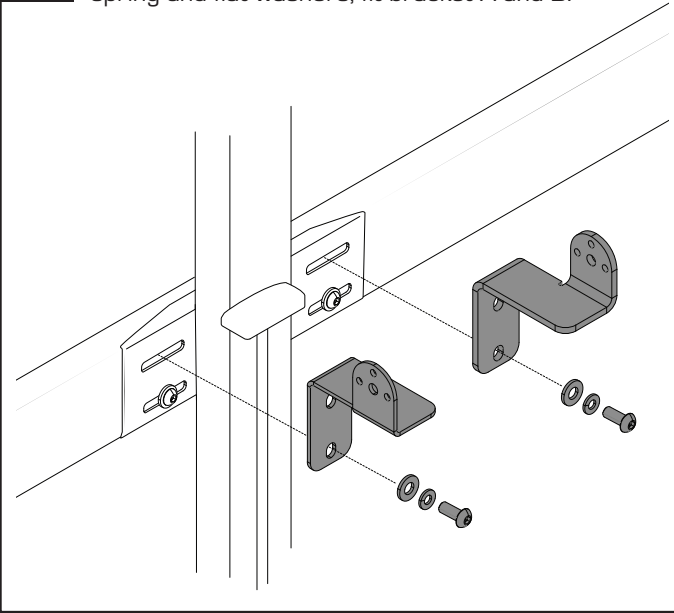



- 4** Fit bracket C with 3x M8 flat washers, an M8 x 20mm button head screw and a nyloc nut.

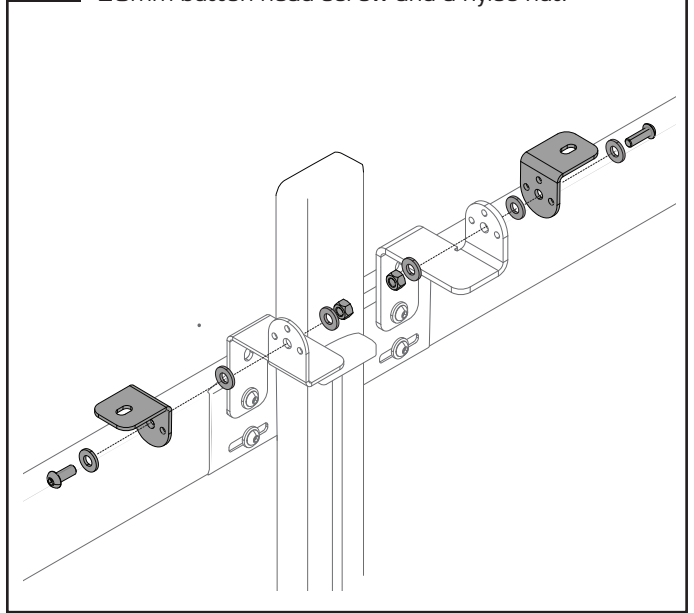

- 3** Position LED light board over brackets and fit with M8x20mm dome head screws, 2x flat washers and a nyloc nut.

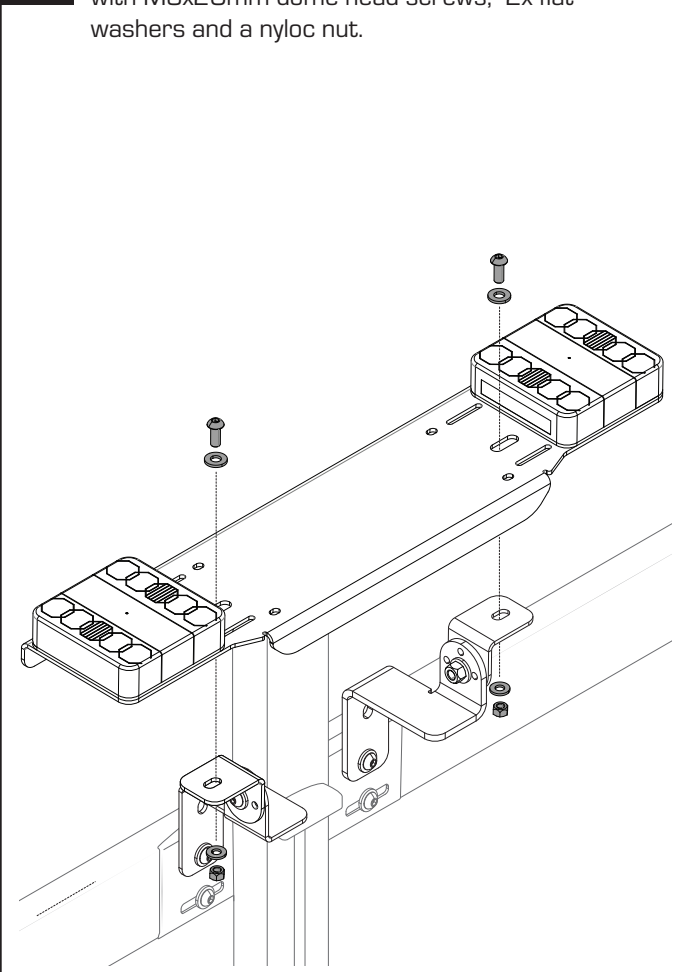


- 4** Using the M5 screws and flange nuts provided, attach the license plate.

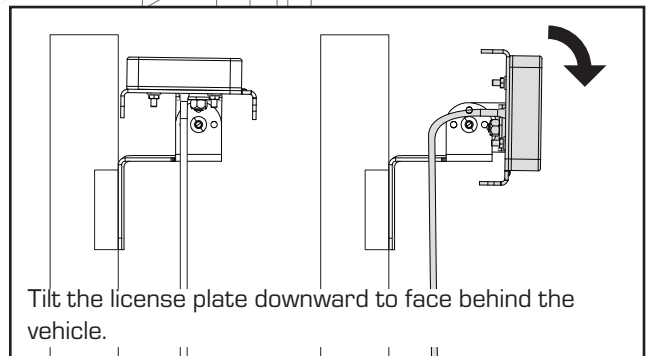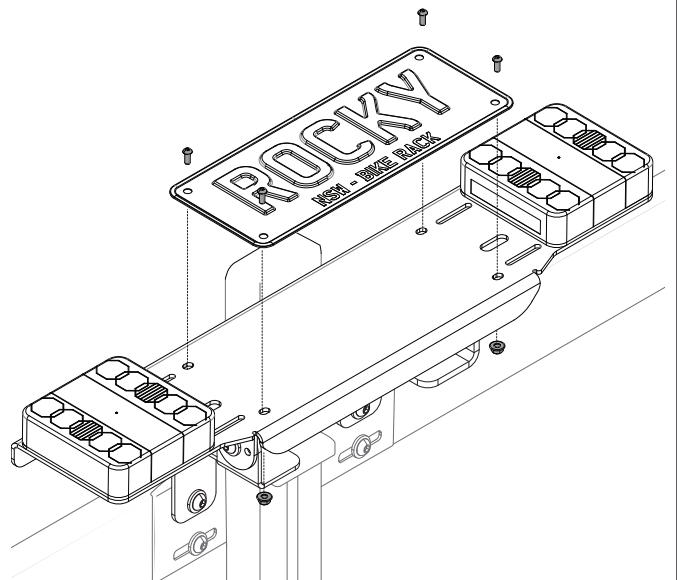


Tilt the license plate downward to face behind the vehicle.



- 5** Lock the license plate in position using the r-clip provided.

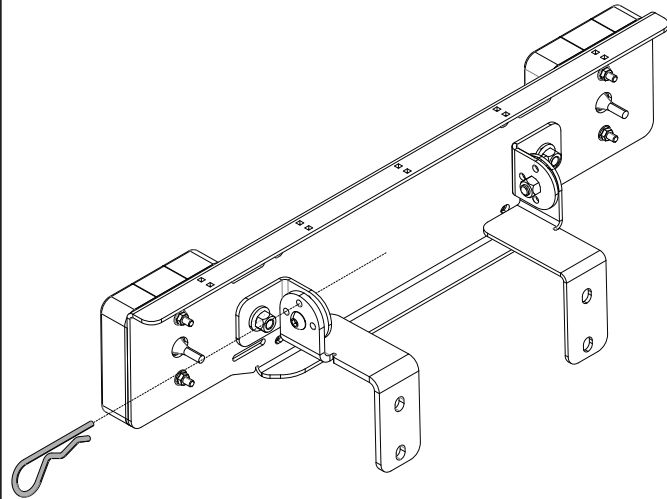

- 6** Wrap the excess cable (from LED light board), around the carrier spine. Plug the 7 pin socket into the connection at the rear of the vehicle.

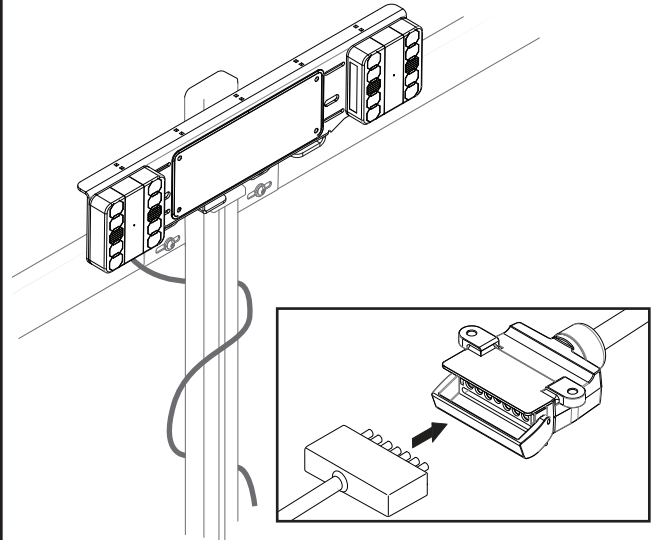

Note, If using the bike carrier in a lowered position, always be sure to reposition the license plate holder as shown. Re-fix plate in place with the r-clip.

